


# VOLUMETRIC DIVIDERS



- St/st carter
- Painted steel construction
- Self-braking motor
- Mechanic speed variator (optional)
- Accurate weight adjustment
- Flour sprinkler
- St/st hopper, round section 60 kg or 200 kg
- 200 Kg hopper round section (standard) h=1786 mm from floor; rectangular section (on demand) h=1740 mm
- Outfeed belt adjustable height
- SV 200 F: outfeed belt with independent motor, only front position
- SV 200 L: double outfeed belt, only lateral position, to space dough pieces
- Automatic lubrication sistem with 6 deliveries pump

## Optional

- Special heavy duty set (standard on mod. SV 200 L 200 kg shd) (stronger selfbraking motor 1,5 kw)
- Manual pump for grease, placed inside the carters, with high capacity tank and level indicator
- High-pressure reinforced pipes
- 6-Rows grease distributor, high capacity st/st oil tank with doule-alarm for oil level)

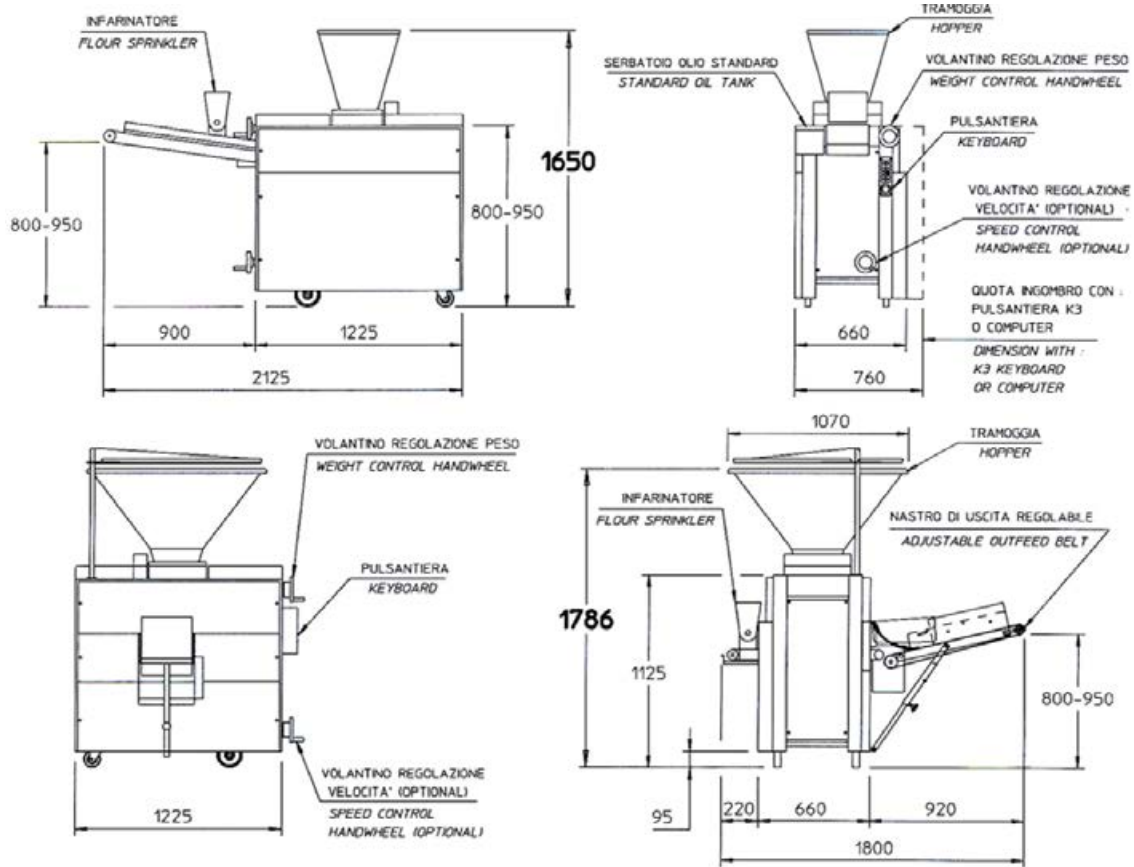

|                 | Weight per piece                    | Production            | Power | Weight | Voltage       |
|-----------------|-------------------------------------|-----------------------|-------|--------|---------------|
|                 | g                                   | Pieces/h              | kW    | kg     | V~/Hz         |
| <b>SV 200 F</b> | 200÷1300                            | 900÷1200              | 1,4   | 750    | V400/3N~/50Hz |
| <b>SV 200 L</b> | 100÷600 2 pezzi<br>300÷2000 1 pezzo | 1800÷2400<br>900÷1200 | 1,1   | 770    | V400/3N~/50Hz |