



F6 C AVANT MOULDERS

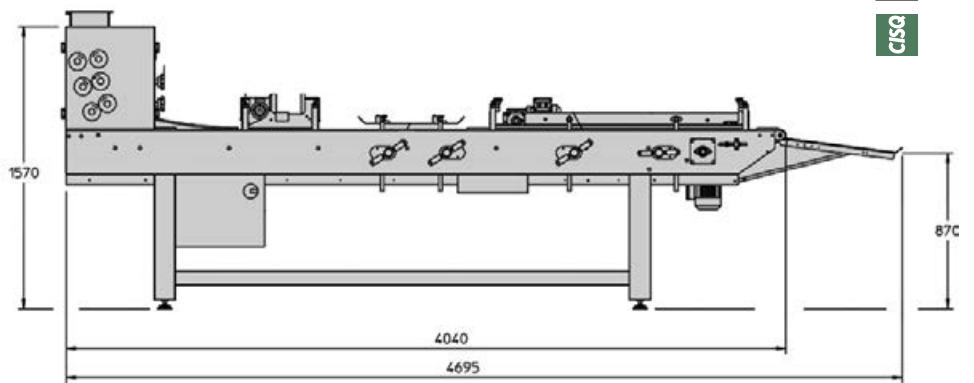

- Whole construction and carter in st/st
- Sheeting with 6 rollers made of non-sticking plastic
- First rollers couple has fix thickness; the other 2 couples have adjustable thickness; precision is given by 2 independent wheels with clock-like indicator for sheeting thickness adjustment
- Sheeting structure made with strong aluminium shoulders, 15 mm thick
- Manual device for pieces centering before sheeting
- Scrapers with pressure springs for each sheeting roller
- St/st pre-moulding mesh for first moulding (400 mm wide, standard)
- St/st pre-moulding mesh with motor - 300 mm wide, 400 mm long (optional)
- Interchangeable pre-moulding table
- Lower moulding belt 900 mm wide
- Upper moulding belt with motor 800 mm side 1200 mm long - with adjustable speed and inverter with 4 independent wheels (with position indicator) you can adjust pressure and inclination of pre-moulding table and upper motorised moulding belt
- Loaf containment sides within table width on demand (optional)
- 3 independent motors: 1 for sheeting cylinders, 1 for upper moulding belt, 1 for upper moulding belt
- 4 supporting legs for moulder

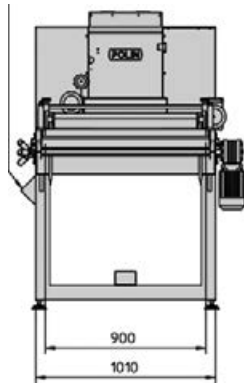

	Belt width	Weight per piece	Power	Weight	Voltage
	mm	g	kW	kg	V~/Hz
F6C AVANT	900	200÷800	1,2	650	V400/3~/50Hz